

Light Commercial Heat Recovery Ventilators



Commercial Heat Recovery Ventilators

offer an energy efficient solution to today's fresh air requirements and IAQ concerns



Built Better to Last Longer

Applications include:

- Office Areas
- Restaurants
- Night Club/Bars
- Hair and Nail Salons
- Day Care Centers
- Indoor Pools
- Locker Rooms
- Apartments/Dorms
- Pet Facilities
- Public Restrooms




www.summertime.com

Light Commercial HRV Features:

- PSC direct drive fan motor, 120 VAC
- Built-in control includes 3 fan speed selections, plus intermittent and standby modes
- Low voltage remote control options
- Automatic recirculating defrost
- Unit rotates 180° for easier duct installation
- MERV 7 washable filters
- Powder coated exterior finish
- Washable polypropylene core with 15 year warranty
- Two year limited warranty on components



SPECIFICATIONS			
DESCRIPTION	SHRV450RD	SHRV600RD	SHRV1100RD
Depth	17 1/2	20 1/2	32 3/4
Length	48	48	48
Height	31	31	31
VAC @ 60 Hz	120	120	120
Amps	10	10	16
Shipping Weight (lbs)	120	180	230
Air Flow CFM			
.7" (175 Pa)	250	300	600
.6" (150 Pa)	300	350	700
.5" (125 Pa)	350	400	800
.4" (100 Pa)	380	470	900
.3" (75 Pa)	420	500	1000
.2" (50 Pa)	460	600	1100
.1" (25 Pa)	480	620	1150
Duct Connection "A"	8"	10"	8"
Duct Connection "B"	12"	12"	20"

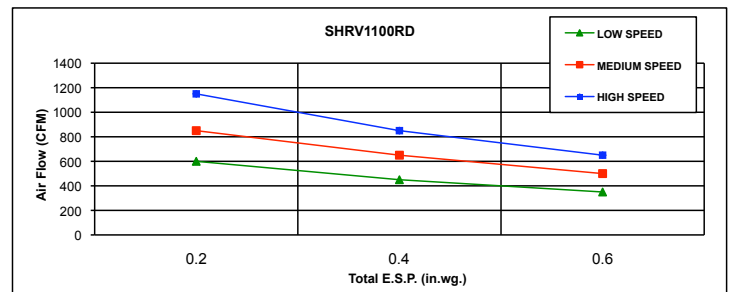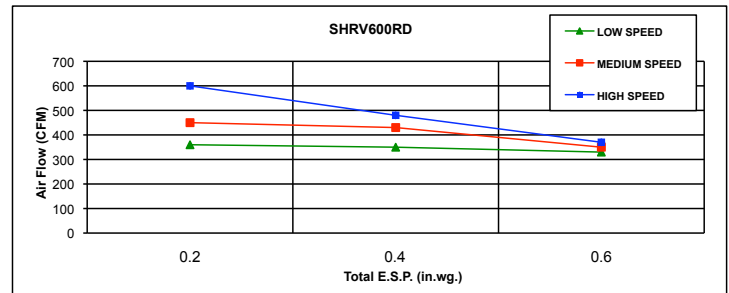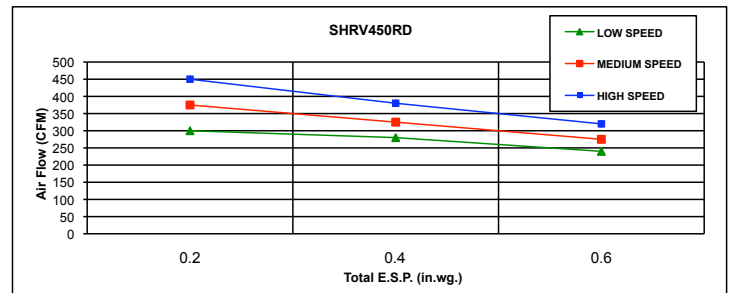


OPTIONAL CONTROLS

CENTRAL CONTROLS
WATCHMAN, SCOUT, SENTINEL II

TIMER CONTROLS
REMOTE TIMER CONTROLS (Available in White, Ivory or Almond)

REMOTE DEHUMIDISTAT

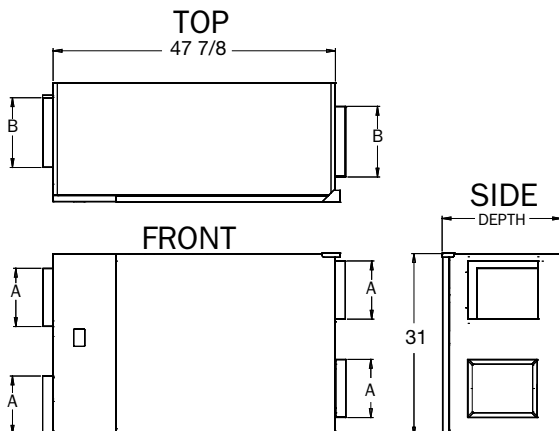

Peterborough, ON, Canada K9J 6X6
 Phone: 705-745-4736
 Fax: 705-745-6491
www.summertime.com

X-LCOM-SS-EN-REV15 - Aug. 29, 2011
 Specifications and illustrations subject to change without notice and without incurring obligations