

# EXCALIBUR



**Efficient Heat Transfer & Long-Term Reliability**

# EXCALIBUR | DURABLE AND EFFICIENT

- :: Stainless Steel Primary Heat Exchanger which provides rapid heat transfer for maximum efficiency!
- :: The design of the Heat Exchanger permits efficient transfer of heat and long term reliability, and quiet operation.
- :: The Cabinet is fabricated from 20 gauge, powder coated steel to provide long life and a high quality finish.
- :: Available in 2 Multifired models; will suit any average size home.
- :: High efficiency “AFG” Beckett burner.



- :: Approved for venting in a Conventional Chimney; “L Vent”; and the SS2 Tjernlund Sidewall Power Ventrator.
- :: Design features make the Excalibur; serviceman and Installer friendly; saves you money, and ensures your furnace is always operating at peak efficiency.
- :: The compact size allows flexible installation in small spaces and provides you with more usable space in your home.
- :: Factory supplied: Quiet, resilient mount 2 speed blower and built-in 120V service outlet. If the 2 speed feature is not required/desired, it can be turned off with the push of a switch. The blower system used in the Excalibur furnace, provides your home with quiet operation, adjustable air speeds to ensure your home is heated to your satisfaction and yet are powerful enough to accommodate air conditioning, even if you wish to add in the future. The 2 speed feature ensures even air flow throughout your home.

# EXCALIBUR | WARRANTY

## 20 YEAR HEAT EXCHANGER WARRANTY!

The Heat Exchanger of all Summaire OLM Series furnaces is covered by a Full Twenty (20) Year Automatically transferable Warranty

## 5 YEAR PARTS WARRANTY!

All components of the OLM Series furnaces are covered by a Full (5) Year Warranty (See Warranty Certificate for details)



# EXCALIBUR | SPECIFICATIONS

## MODELS OLM85 & OLM125

## SPECIFICATIONS

Model	U.S.G.P.H. Input	Pump Pressure	B.T.U.H. Output	Blower	Motor H.P. 4 Speed	Motor Speed Tap	Burner	Temp. Rise Deg. F
OLM85	.60	100	67360	G8-10DD	1/3	Med.-Low	AFG	50
OLM85	.65	100	72020	G8-10DD	1/3	Med.-Low	AFG	55
OLM85	.75	100	83140	G8-10DD	1/3	Med.-Low	AFG	60



Nozzle make and type: Delevan 60 Deg. B

OLM125	.85	112	98720	G10-DD	3/4	High	AFG	60
OLM125	1.00	115	112060	G10-DD	3/4	High	AFG	65
OLM125	1.10	100	124500	G10-DD	3/4	High	AFG	70

Nozzle make and type: Delevan 60 Deg. B


OLM85 factory shipped with Delevan .65 Nozzle  
 OLM125 factory shipped with Delevan 1.00 Nozzle

Venting: Standard chimney  
 "L" vent  
 SS2 Tjernlund sidewall power ventor

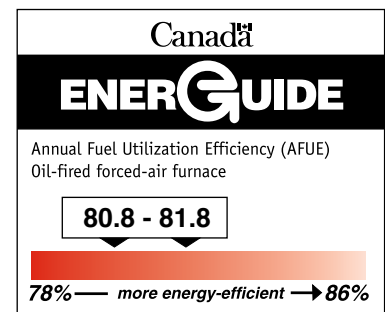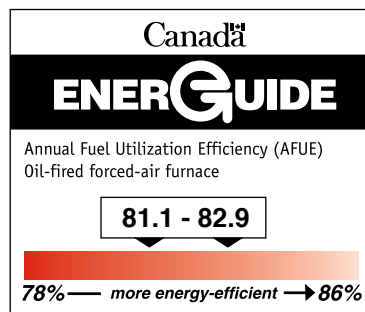

OLM85

OLM125

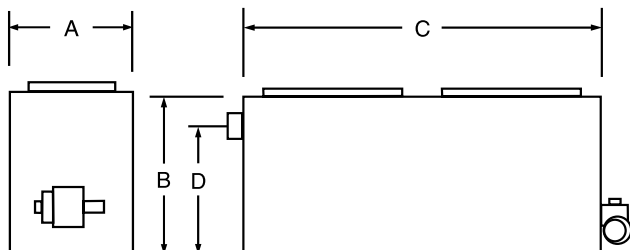

## DIMENSIONS

Model	Cabinet			Plenum Openings		Flue		Shipping Wt.
	Width (A)	Height (B)	Length (C)	Warm Air	Return Air	Diameter (F)	Height (D)	Lbs.
OLM85	21 1/8"	31 3/4"	44 1/4"	20" X 20"	20" X 20"	5"	26 3/4"	200
OLM125	21 1/8"	34 3/4"	50 3/4"	20" X 24"	20" X 22"	6"	28 3/4"	225



Summerraire Mfg.  
 Peterborough, Ontario, Canada, K9J 6X6

